Unit:mm

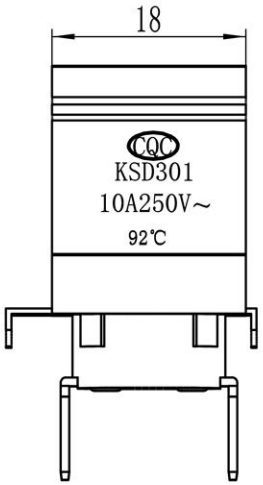

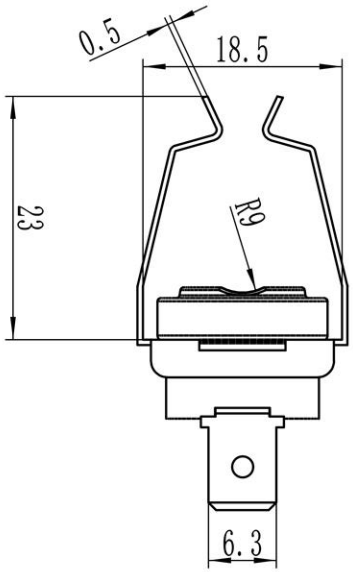

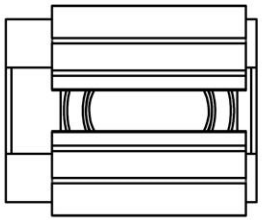

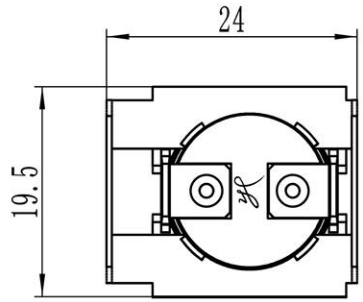

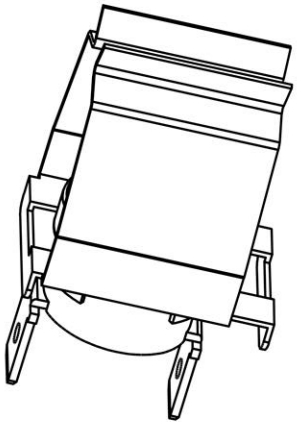

Technical requirements:

1. The product requires CQC, TUV certification
2. 10A/250V temperature limit temperature 92 ± 3 degrees power off, 70 ± 5 degrees reset
3. The temperature limit temperature current and voltage certification marks are marked on the aluminum cover of the product
4. Insulation The resistance is not less than 100MOhm
5. The insulating parts withstand 2000V~/1mA/1min; during normal operation, the leakage current is less than or equal to 0.5mA
6. There is no obvious burr on the terminals
7. Under rated load conditions, the action is not less than 30000 times (the cycle is 10 minutes) /time)
8. The terminal can withstand 10kg in the axial direction and 7kg in the radial direction without causing functional problems
9. There should be no obvious burrs on the surface of the parts, and the signs are clearly visible

标记	处数	更改文件名	签 字	日 期
设 计		陈房新		2022-06-06
			日 期	

Dongguan Ampfort Electronics Co., Ltd.

图 样 标 记	重 量	比 例
		2:1
共 张	第 张	

Φ18 Pipe Clamp 6.3 Vertical Ceramic

KSD301 10A

92℃

P/N: KSD301-92CP